



Product

INOX-PRO Stainless Steel Shock Arrestors


- 11B000AA02 - 0.16L INOX-PRO Shock Arrestor 1/2" Connection with Brushed Finish
- 11B000AA18 - 0.16L INOX-PRO Shock Arrestor 1/4" Connection with Brushed Finish
- 11B000BB02 - 0.5L INOX-PRO Shock Arrestor 1/2" Connection with Brushed Finish
- 11B000AA07 - 0.16L INOX-PRO Shock Arrestor 15mm Connection with Polished Finish
- 11B000BB00 - 0.5L INOX-PRO Shock Arrestor 1/2" Connection with Polished Finish

Technical Specification

Operating Temperatures:	-10°C - 99°C
Max Working Pressure:	15 Bar
Pre Charge Pressure:	3.5 Bar
Shell:	304 Grade Stainless Steel
Connection:	Stainless Steel
Membrane:	Butyl

Dimensions

Code	Capacity (Litres)	Diameter Ø(mm)	Height H(mm)	Connection ØC(BSP)
11B000AA02	0.16L	82	72	½" G
11B000AA18	0.16L	82	72	¾" G
11B000BB02	0.5	94	119	½" G Inox
11B000AA07	0.16L	82	72	15mm
11B000BB00	0.5	94	119	½" G Inox

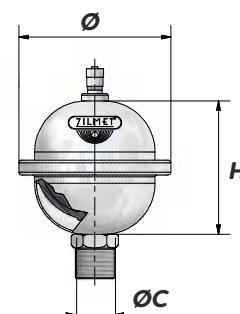

Additional Information

Prevents water hammer effect in water systems, solving vibration and noises issues.

Ideal for installations where hygiene is at a premium




5 years warranty

100% factory tested

Suitable for alimentary purposes

Fully certified according to the pressure equipment directive 2014/68/EU

Typical Installations

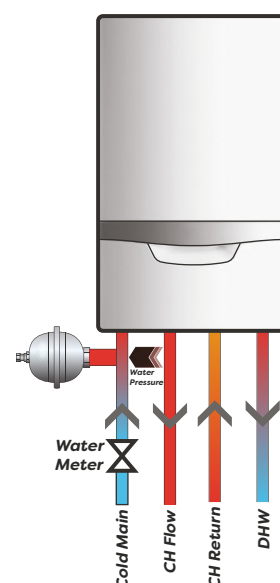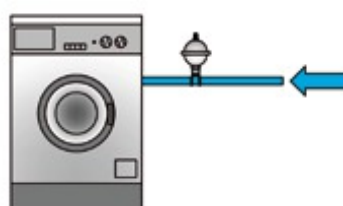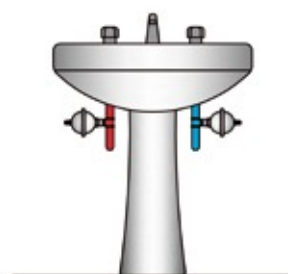

Scan for Further Information

Zilmet UK Limited, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272185 E. sales@zilmet.co.uk

01/24
E&OE