



ULTRA-PRO 16 Bar Datasheet

Technical and dimensional data

Vertical Vessels

Model	Code	Capacity (Ltr)	Ø Diameter	Height	Maximum Pressure	Pre-charge	Connection
ULTRA PRO 24*	11000024B6	24	270mm	290mm	16 bar	2 bar	1" G
ULTRA PRO 24	11000024B4	24	270mm	485mm	16 bar	2 bar	1" G
ULTRA PRO 100	1100010055	100	450mm	910mm	16 bar	2 bar	1" G
ULTRA PRO 200	1100020052	200	550mm	1235mm	16 bar	2 bar	1 1/2" G
ULTRA PRO 300	1100030048	300	630mm	1365mm	16 bar	2 bar	1 1/2" G
ULTRA PRO 500	1100050053	500	750mm	1560mm	16 bar	2 bar	1 1/2" G

*Horizontal


Operating conditions

Maximum working pressure	16 bar
Maximum operating temperature	99°C
Factory pre-charge	2 bar

Material description

Description	Material
Shell	Carbon Steel
Membrane	Butyl*
Flange	Painted flange
Colour	Blue

Technical drawings

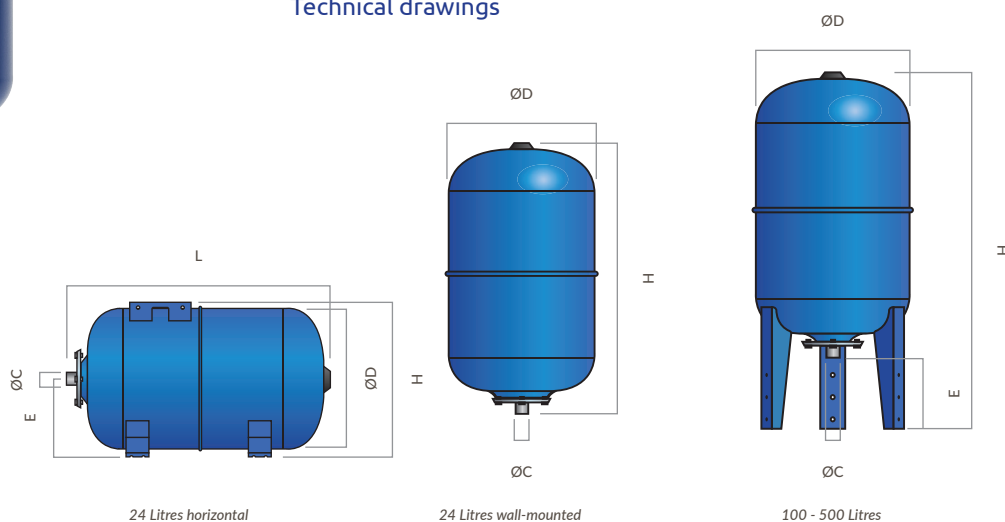

Certification



Scan for Further Information

Zilmet UK Limited, Airfield Industrial Estate, Hixon,
Stafford, ST18 0PF
T. 01889 272185 E. sales@zilmet.co.uk



Scan for Vessel Sizing Calculator