



Product

ULTRA-PRO Horizontal Potable Expansion Vessels With Replaceable Membranes


- 11000024A8 - ULTRA-PRO 24L Horizontal With 3/4" Connection
- 1100002406 - ULTRA-PRO 24L Horizontal With 1" Connection
- 1100005007- ULTRA-PRO 50L Horizontal With 1" Connection
- 1100006007- ULTRA-PRO 60L Horizontal With 1" Connection
- 1100008007- ULTRA-PRO 80L Horizontal With 1" Connection
- 1100010007- ULTRA-PRO 100L Horizontal With 1" Connection
- 1100020007- ULTRA-PRO 200L Horizontal With 1 1/2" Connection
- 1100030007- ULTRA-PRO 300L Horizontal With 1 1/2" Connection

Technical Specification

Max Pressure:	10 Bar
Pressure Pre Charge:	1.5 Bar
Temperature Range:	-10°C - 99°C
Max Working Pressure:	10 Bar
Colour:	Blue (RAL 5055)
Shell & Bracket Type:	MIG Welded Carbon Steel
Membrane:	Butyl / EPDM
Flanges & Connection:	Galvanised SST / SST
Orientation:	Horizontal Only

Dimensions

Code	Capacity (Litres)	Diameter Ø(mm)	Height H(mm)	Length L(mm)	E (mm)	Connection ØC
11000024A8	24	270	290	485	155	3/4" BSP
1100002406	24	270	290	485	155	1" BSP
1100005007	50	380	410	560	220	1" BSP
1100006007	60	380	410	640	220	1" BSP
1100008007	80	450	480	640	255	1" BSP
1100010007	100	450	480	730	255	1" BSP
1100020007	200	550	580	985	305	1 1/2" BSP
1100030007	300	630	660	1140	345	1 1/2" BSP

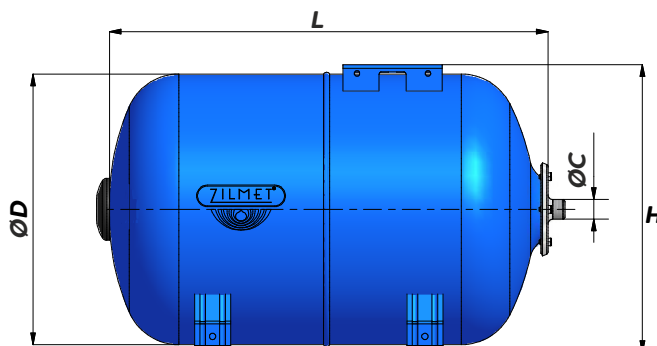

Additional Information

5 years warranty

Suitable for multiple plumbing systems

100% factory tested

Externally finished in a hard wearing epoxy powder coating

Robust welded bracket creating easier installation

Replaceable membrane and flanges making the vessel repairable

Fully certified according to the Pressure equipment directive 2014/68/EU

Scan here for more information and the vessel sizing calculator!



Scan for Further Information



Scan for Vessel Sizing Calculator

Zilmet UK Limited, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272185 E. sales@zilmet.co.uk